



## Installation Instructions

For Part Numbers :

300-944 Modular Intake Tube

2004-06 Dodge Durango 4.7L V8



INTAKE SYSTEMS FOR VEHICLES LISTED ARE 50 STATE LEGAL. SEE AIRAID.COM FOR CARB STATUS ON EACH PART FOR A SPECIFIC VEHICLE.

### Component Identification

1.	Modular Intake Tube	1
2.	Silicone Hose Reducer	1
3.	Urethane Hump Hose	1
4.	Rubber Grommet	1
5.	#52 Hose Clamp	1
6.	#56 Hose Clamp	1
7.	#60 Hose Clamp	2
8.	Airaid Decal	1

Full color instructions can be viewed on our web site at [Airaid.com](http://Airaid.com). If you need any assistance please call 1-800-858-3333 to speak with a representative in our Customer Service Center before returning the product.



**1. Disconnect The Negative Battery Terminal!**  
Remove the breather hose from the factory air box lid.



**2.** Loosen the two hose clamps on each end of the factory intake tube.




**3.** Unsnap the factory silencer box from the fan shroud and remove the factory tube assembly from the vehicle.



**4.** Disconnect the factory electrical connector from the factory air temperature sensor.



**5.** Loosen the two 10mm bolts mounting the factory air box to the intake manifold and remove from vehicle.

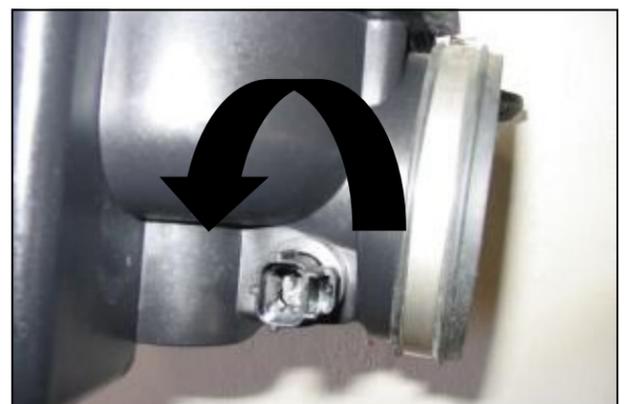

**6.** Turn the air temperature sensor 1/4 turn and remove from the air box. Retain sensor for later use.



**7.** Install the reducer hose and a #52 hose clamp onto the throttle body. Install a #56 hose clamp onto the other side of the reducer.



**8.** Slide the urethane hump hose onto straight end of Airaid intake tube with two #60 hose clamps. (*Note: Leave hose clamps loose until final assembly.*)



**9.** Install Airaid intake tube assembly by connecting the Airaid hump hose onto the factory air box lid and the other end onto the Airaid reducer hose. Tighten all hose clamps. Apply the Airaid Bubble Decal onto the Intake Tube as shown.



10. Install the supplied rubber grommet and factory air temperature sensor into the Airaid intake tube. Then, reconnect the factory electrical connector onto the sensor. Lastly, reconnect the factory breather hose to the air box lid.

11. Double check your work to be certain that all nuts, bolts, and clamps are securely fastened.

12. Reconnect the negative battery cable.

Thank you for purchasing the Airaid Intake System. Contact Airaid @ (800) 498-6951 8:00 AM - 5:00 PM MST weekdays for questions regarding fit or instructions that are not clear to you. Your Airaid Intake System was carefully inspected and packaged. Check that no parts are missing, or were damaged during shipping. If any parts are missing, contact Airaid. The air filter element is protected from direct exposure to water and debris; care should be taken not to drive through deep water. WATER INGESTION IS THE DRIVERS RESPONSIBILITY!



INTAKE SYSTEMS FOR VEHICLES LISTED ARE 50 STATE  
LEGAL. SEE AIRAID.COM FOR CARB STATUS ON EACH  
PART FOR A SPECIFIC VEHICLE.